

01-29-00

17

JCE48 U.S. PTO

06/28/00

Please type a plus sign (+) inside this box → ☐Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 476-1928

First Inventor or Application Identifier Mauger

Title Communications Network

Express Mail Label No. EL 388 802 064 US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 21]
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 10]
4. Oath or Declaration [Total Pages]
- a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of
(when there is an assignee) ☐ Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 ☐ Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity ☐ Statement filed in prior application,
Statement(s) ☐ Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____ / _____
Prior application information: Examiner _____ Group / Art Unit: _____**For CONTINUATION or DIVISIONAL APPS only:** The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.**17. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	William M. Lee, Jr.			
	Lee, Mann, Smith, McWilliams, Sweeney & Ohlson			
Address	P.O. Box 2786			
City	Chicago	State	Illinois	Zip Code 60690-2786
Country	USA	Telephone	(312) 368-1300	Fax (312) 368-0034

Name (Print/Type)	William M. Lee, Jr.	Registration No. (Attorney/Agent)	26,935
Signature	<i>William M. Lee, Jr.</i>	Date	6/28/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Please acknowledge
receipt of the
enclosed:
Roy Mauger et al.

Communications NetworkSERIAL NO: To be assignedFILING DATE: Herewith

1. Utility Patent Application Transmittal
2. Fee Transmittal for FY 1999 in duplicate
3. Check No. 40383 for \$858.00
4. Specification with ten (10) sheets of drawings
5. Certificate of EXPRESS MAIL.
6. Return Post Card.

DATE SENT: June 28, 2000

WJR:lmb

"Express Mail" mailing label number

EL388802064US

Date of deposit: June 28, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Richard Sensenbrenner

(Typed or printed name of person mailing paper or fee)



(Signature of person mailing paper or fee)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

BY

**Roy Mauger
47 Beech Avenue
Radlett
Hertfordshire
WD7 7DD
United Kingdom**

**Dave Stacey
12 Cresset Close
Stansted Abbots
Hertfordshire
SG 12 8LL
United Kingdom**

and

**Mark Gibson
23 East Road
Bishops Stortford
Hertfordshire
CM23 5JG
United Kingdom**

FOR

COMMUNICATIONS NETWORK

COMMUNICATIONS NETWORK**FIELD OF THE INVENTION**

This invention relates to arrangements and methods for the switching or routing of traffic in a communication network

BACKGROUND OF THE INVENTION

- 5 Traditionally, two types of legacy telecommunication networks have been developed. The first type of legacy network is connection oriented and is used for the transport of narrow band voice traffic, typically carried in TDM frames. Such networks comprise for example synchronous or plesiochronous networks. The second type of legacy network is connectionless in nature and is used for the transport of broad band
- 10 packet or cell-based data traffic. Such packet traffic includes for example Internet protocol (IP) traffic. There is currently a drive towards unified networks which provide end to end transport for both voice and data services, and to this end the use of asynchronous transport has been introduced. This of course introduces the problem of supporting different protocols over a common network.
- 15 Asynchronous Transfer Mode (ATM) is the technology specified by the ITU-T as a broadband network technology suitable for all applications. For Internet protocol traffic however, ATM has proven to be less than fully effective at supporting Layer 3 routed applications, such as routed virtual private networks. This has led the IRTF
- 20 (Internet Research Task Force) to specify multi-protocol label switching (MPLS) as a technology which inherits the desirable characteristics of ATM but is better matched to the Internet protocol. In particular MPLS provides a frame merge function in which data frames received from multiple sources are captured and sent out with a common label. This is key to support of Internet protocol Layer 3 Routed services.
- 25 Service providers would ideally prefer a single network technology to support all of the services that they provide as this would achieve the lowest possible operational cost.
- 30 A particular problem with the introduction of a multi-service network is that of accommodating the various transport protocols and, in particular, that of providing end to end quality of service guarantees for high priority traffic such as voice. In particular, there is a need to provide a network that can carry both data and voice traffic at a local, national and international level while utilising a common transport

protocol. A further problem with such a network is that of real time management of the virtual public/private networks that are established within the network. At present, each VPN manager requires a detailed knowledge of the network topology. In a large network this is a very significant operational task.

5

SUMMARY OF THE INVENTION

An object of the invention is to minimise or to overcome the above disadvantages.

- 10 According to a first aspect of the invention, there is provided a method of routing an information packet over a label switched path between first and second end stations in a virtual private network defined over a network arrangement comprising a hierarchical arrangement of first, second and third levels of routers, the method comprising attaching to the information packet at a network edge a sequence of first, 15 second and third labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual private network, each said path section extending between a pair of said routers.

- 20 According to another aspect of the invention, there is provided a communications multi-service network comprising; a plurality of nodes interconnected via quality of service capable tunnels and incorporating a frame-mode label switched (MPLS) architecture, wherein end-to-end communications having a predetermined quality of service are provided by defining at the network edge a label stack of first, second and third labels for delivering packets through a sequence of said tunnels defined by the 25 label stack.

- 30 According to a further aspect of the invention, there is provided a communications multi-service network incorporating a plurality of dynamic multiplex constraint based label switched paths defining quality of service capable tunnels, each said path comprising a second layer constraint based label switched paths constrained within two first-layer constraint based label switched paths.

- 35 In our co-pending application serial number 09/xxxx (11862IDMauger) the use of a two-layer MPLS network in order to simplify the management of Virtual Public/Private Networks (VPN) is described. In this application, the use of a three-label stack provides connection oriented behaviour for voice traffic whilst retaining strict edge control analogous to standard IP network operation. The use of a three layer, five

stage hierarchical network of routers enables the technique to be employed over an international or global network.

5 In a preferred embodiment, the invention provides a system in which a five-stage switching network is configured to allow scaling to the largest sizes required by any network operator for IP networking, Session Switched Multimedia, PSTN or any other service in a Multiservice network architecture.

10 In a preferred embodiment, the Common Open Policy Service (COPS) protocol is used to push MPLS Label Switched Paths (LSP) to establish a five-stage network and to establish end-to-end QoS capable connections.

15 In a further embodiment of the invention, there is provided a multi-service communications network incorporating at least one dynamic multiplex label switched path comprising a second layer constraint-based routed label switched path multiplexed into two first-layer constraint-based routed label switched paths.

20 The resource availability of the second-stage layer 1 CR-LSPs may be advertised periodically to the first-stage LSRs such that the resource availability may be utilised in DM-LSP path selection.

25 Advantageously, the individual dynamic multiplex label switched paths (DM-LSPs) have no pre-defined traffic contracts but instead are constrained by the traffic contracts of the first layer constraint-based routed label switched paths (CR-LSPs) in which they are contained.

30 In a preferred embodiment of the invention, we employ a three-layer label stack at the edge of the network in order to achieve end-to-end connection oriented behaviour with guaranteed quality of service. We have found that the use of the three-layer label stack is sufficient to minimise the control of the network to the two edges of the network and a single central switching stage of the network. In this manner the real-time control constraints placed on the second and fourth stages of the network are removed thus enabling these stages to scale to extremely large capacity.

35 Advantageously, a virtual private/public network is defined with multiple stages of constraint-based routed label switched paths.

MPLS has been defined by the IETF so as to be independent of the underlying transport mechanism. Mappings on to ATM have been defined as well as frame-mode networks using HDLC (High-level data link control) based or other forms of frame transport.

5

MPLS includes the concept of stacked labels; this allows a network to operate at multiple layers. For instance a first label in the stack can relate to a traffic trunk. A switch which only swapped this first label would handle the traffic trunk transparently. A switch which popped the first label, swapped the second label and pushed a new first label would be switching a service instance between two traffic trunks.

10

In our arrangement and method, a third level of label is employed in conjunction with a dynamic multiplex constraint-based routed label switched path (CR-LSP) in order to achieve implicit switching at certain nodes within a network. Implicit switching occurs when a switching function takes place at a node without the need for any control function being required at that node. Such an implicit switching function provides the advantages of simplifying the overall control architecture of the network and minimising the real-time processing requirements on those nodes that perform the implicit switching function. This enables very large scale nodes to be implemented while maintaining the flexibility of having switching points at those nodes.

15

20

Advantageously, a bandwidth allocation mechanism is used to pre-allocate, on a predictive or as needed basis, capacity within the second-stage Layer 1 constraint-based routed label switched paths such that dynamic multiplexed label switched path selection is deterministic

25

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures

30

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention will now be described with reference to the accompanying drawings in which:-

35

Figure 1 is a schematic diagram of an exemplary virtual public/private network according to a preferred embodiment of the invention;

Figure 2 shows the construction of an abstract node employed in the network of figure 1 and illustrates the network construction in further detail;

5 Figure 3 shows an exemplary Layer 1 management and bearer control architecture;

Figure 4 illustrates a virtual public/private network information model;

10 Figure 5 illustrates the concept of a Dynamic Multiplex - Label Switched Path,

Figure 6 illustrates a virtual public/private network controlled by a three-label stack according to a preferred embodiment of the invention,

15 Figure 7 illustrates the use of the COPS push mechanism to establish MPLS paths.

Figure 8 illustrates the label processing functions at each node of figure 6

20 Figure 9 illustrates an embodiment of figure 6 demonstrating its scalability to a large network,

Figure 10 illustrates the control functions of figure 6 to guarantee connection oriented behaviours of the end-to-end path.

25

DESCRIPTION OF PREFERRED EMBODIMENTS

Referring first to figure 1, which is introduced for explanatory and comparative purposes, this figure illustrates in highly schematic form an exemplary virtual public/private network (VPN) deployed nationally or regionally in order to provide session switched multimedia services on a territorial basis. The network comprises a number of service nodes 11, located at the main centres of population, inter-linked via a network of core nodes by quality-of-service (QoS) capable tunnels 12. The construction of the core network will be described below. In figure 1, only one core node 18 is shown in the interests of clarity, but it will of course be appreciated that the network will incorporate a plurality of core nodes. Access to the network from user terminals 13 is provided via media gateways 14 each serving to one or more

30

35

service nodes 11. Traffic is transported on constraint-based routed label switched paths (CR-LSP) 15 established between respective gateways. The network carries packet traffic, each packet 16 comprising a payload and first and second labels (Label1, Label2) indicative of the path over which the packet is to be routed.

5

CR-LSPs (constraint-based routed label switched paths) are deployed between the service nodes 11 of the network. Services such as inter-active voice, requiring strict QoS guarantees are supported by end-to-end CR-LSPs 15 as illustrated in figure 1. To take a simple example of QoS support, if all of the CR-LSPs at both traffic-trunk
10 level and end-to-end are constant bit rate, then the performance of the end-to-end CR-LSP can be substantially equivalent to ATM-AAL1 (Asynchronous Transfer Mode Adaptation Layer One) assuming a typical 48-byte packetisation.

The IETF has defined two protocols for the establishment of CR-LSPs. These
15 protocols are RSVP-Traffic Engineering, and Constraint-routed Label Distribution Protocol. CR-LSPs (constraint-based routed label switched paths) are point-to-point paths between designated network nodes. Such paths are each assigned a traffic contract which, in suitable carrier strength implementations, will be policed for conformance. We prefer to employ the CR-LDP protocol, but it will be appreciated by
20 those skilled in the art that the RSVP-TE protocol has equivalent functionality and can be used to serve the same purpose. Such a CR-LSP has an LSPID (label switched path identifier) which can be used to specify a hop in a CR-LDP request. In such a case the new CR-LSP will be multiplexed into the specified CR-LSP and allocated a second level label. It is therefore possible to specify within the network of
25 figure 1 a virtual public/private network (VPN) with multiple stages of first level CR-LSPs and to provide end-to-end services having a CR-LSP traffic contract by multiplexing further CR-LSPs into a set of appropriate first level CR-LSPs.

A feature of the constraint based routed label distribution protocol (CR-LDP)
30 employed in the network of figure 1 is the use of an "abstract node" to define routing constraints. An abstract node consists of a sub-network of real nodes (core nodes) over which the constraint based routed label distribution protocol is allowed to select any available path to achieve a requested connection. Thus in a path specified as (real node A - abstract node B - abstract node C - real-node D) there may be multiple
35 real nodes in each of the abstract nodes, and there may also be multiple trunks between the abstract nodes. This concept of abstract nodes simplifies the management of a VPN as the network manager only requires a view of the network

at the abstract node level and does not require detailed view of the construction or internal operation of an abstract node.

Referring now to figure 2, which is also introduced for explanatory and comparative purposes, this depicts in schematic form a portion of the network of figure 1. Figure 2 is a representation of a simple network in its abstract node form, together with a possible real network realisation of one of the abstract nodes.

The network represents groups of multiple service nodes (SN) 11 each arranged around a respective abstract node (AN) 22 in each of four locations. One of the abstract nodes 22 is shown in detail to illustrate its construction from a sub-network of four core nodes (CN) 18 with multiple transport links 23 therebetween. In the network of figures 1 and 2, an abstract node is defined by an IP address prefix, and all core nodes which include that prefix in their IP address are treated as part of that abstract node. It will of course be understood that an abstract node may be constructed from some other number of core nodes. Further, abstract nodes can have a temporary, semi-permanent or permanent existence depending on the network requirements.

Constraint based routed label switched paths 15 are deployed between service nodes 11 via the appropriate intervening abstract nodes 22.

In the arrangement of figures 1 and 2, it is relatively simple for a management system controlling the real network to produce an abstract node version of its information model for use on a super-ordinate network manager. It is also relatively easy to produce a graphical representation of such a network and to specify traffic trunks by defining paths between service nodes and passing through abstract nodes. These graphical paths can then be used to automatically construct CR-LDP requests to establish the traffic trunks. CR-LDP can run on an existing constraint-based routed label switched path (CR-LSP) to renegotiate the traffic contract so that the technique provides for near real-time creation of VPNs as well as flexible service level agreements which can be modified e.g. on a diurnal basis or on any basis which suits the customer traffic profile.

A management and bearer control function for the Layer 1 physical network of figures 1 and 2 is illustrated in figure 3. This figure shows by way of example a simple network based on a group of core nodes 18, constituting an abstract node 22, and

15 The information model illustrated in figure 4 for the sub-network manager 32 is also simplified in that only the Layer 2 virtual switches (VS) 41 are visible. These virtual switches are configured with access ports 42 to which users are connected and traffic trunks 43 configured end-to-end and provisioned with SLAs.

Referring now to figure 5 the concept of a Dynamic Multiplex Label Switch Path (DM-LSP) according to a preferred embodiment of the invention is illustrated. In the exemplary network of figure 5, a hierarchical three layer arrangement of local nodes 51a, regional nodes 51b and international nodes 51c is provided, each node comprising a label switched router. Within the three-stage network of MPLS label switched routers (LSR) a mesh of Layer 1 label switched paths (LSPs) 55 is established. As described above, it is possible to define the constraints for a new label switched path (LSP) in terms of existing LSPs in which case a Layer 2 LSP is established and a second level label defines the embedded CR-LSP. In the DM-LSP arrangement illustrated in figure 5, a third level label is defined which relates to one of a number of sessions which can be dynamically multiplexed onto the same label switched path (LSP). The DM-LSP 57 itself has no explicit traffic contract, but is instead subject to the following constraint. A new session may be multiplexed onto the DM-LSP 57 if and only if the resource constraints of the first-stage and second-stage Layer 1 constraint-based routed label switched paths (CR-LSPs) are satisfied. The checking of these constraints can be performed in the first and third stage LSRs which have full visibility of the resources committed to the first-stage and second-stage Layer 1 LSPs respectively. The second-stage (central) LSRs 51b perform an implicit switching function in that sessions may be dynamically routed between first

and third stage LSRs using any available Layer1 CR-LSPs, but the second stage LSRs are not involved in the control process. This simplifies the overall control architecture for the network, and minimises the real-time processing requirements on these second (central) stage LSRs enabling them to scale significantly, yet still maintains full switching flexibility. Figure 5 also illustrates a number of LSRs which are used to route the Layer 1 CR-LSPs. These are additional network stages that may be required for the traffic management of large numbers of VPNs. They need not be directly involved in the operation of the DM-LSPs. The establishment of a DM-LSP may be implemented in CR-LDP. CR-LDP using the label request message to establish CR-LSPs. Within this message, notification that this is a DM-LSP may be signalled explicitly by defining a type length value (TLV) field that conveys this information. Alternatively, an existing traffic TLV may be used by setting the traffic contract parameters (Peak Data Rate etc.) to null values. On receipt of these null values, the receiver nodes are able to infer that, as no traffic contract is defined yet although the new CR-LSP is to be established within first-layer CR-LSPs with traffic contracts, then this request must be for a DM-LSP. Those skilled in the art will recognise that similar mechanisms may also be defined for RSVP-TE.

The ingress point to the DM-LSP (the first stage LSR 51a) has no inherent visibility of the available resource within the second-stage Layer 1 LSP, and thus requests to establish new sessions upon the DM-LSP may be denied due to insufficient resource within the second stage (egress) Layer 1 ER-LSP. The probability of denial may be significantly reduced if the third-stage (egress) LSR periodically advertises the available resources (within the second stage Layer 1 LSR) to the first stage LSRs. This resource information enables the first stage LSRs to select DM-LSPs with a higher probability of success. Alternately, the probability of denial may be eliminated substantially entirely by employing a mechanism whereby the second-stage Layer 1 CR-LSP bandwidth is pre-allocated to DM-LSPs according to current (and predicted future) needs. To implement this latter mechanism, the first stage LSR sends signalled requests to the relevant third-stage LSR asking for an additional allocation of bandwidth to a particular DM-LSP. This request will be granted provided bandwidth is available and the request meets the policy constraints set by the network. An equivalent process is used to relinquish capacity when that capacity is no longer required. A simple bandwidth management function implemented within the third stage (egress) LSR can be used to perform either of these two mechanisms.

In the reverse direction, the LSP-ID list comprises a list of the two DM-LSPs that the far-end admission manager has chosen for the session request. This list comprises one of the candidate DM-LSPs offered by the originating admission manager plus a
5 DM-LSP that will provide the connection from the third to fifth stage LSR (National Tandem to Local). The scheme may be operated separately for each direction of transport or bi-directional operation may be chosen. The five-stage network is sufficient for long distance or global traffic. Fewer stages would be required for local services.

10

Once a DM-LSP (dynamic multiplex label switched path) pair-set has been negotiated, the end-to-end connection is established by the originating media gateway controller. This gateway controller uses e.g. H.248 to communicate with the originating media gateway and defines both the ingress logical port that connects the
15 terminal to the media gateway together with a bearer package characterising a path across the network. This bearer package contains the first stage LSR IP address, the LSP-ID for the DM-LSP that connects the first to third stage LSRs, the LSP-ID for the DM-LSP that connects the third to fifth stage LSRs and the IP address of the terminating media gateway. This last address will either have been signalled as part
20 of the normal inter-MGC call control signalling, or it could be tunnelled as part of the path negotiation process just described. The originating media gateway uses the bearer package to initiate an end-to-end CR-LDP label request message that establishes a path from media gateway to media gateway. In parallel, the terminating media gateway controller issues an H.248 command to connect this path
25 to the logical port that connects the media gateway to the far-end terminal thus establishing the end-to-end session. The CR-LDP label request message will explicitly cause the bandwidth capacity control functions to be executed on the first, third and fifth stage LSRs (Local, National Tandem, Local). Thus the connection will be rejected if bandwidth is not currently available. This eliminates the potential for
30 race conditions or any inaccuracies in bandwidth control/advertisement mechanisms. The QoS of existing sessions is always preserved.

In the media gateway-initiated path reservation mechanism described above, the media gateways are explicitly informed of the LSP-IDs used in the core network. If
35 the media gateways are not fully trusted parties, then from a security perspective it would be advantageous to hide these core LSP-IDs from them and the following alternative reservation mechanism achieves this.

000290" 2250960

In this alternative embodiment, a pool of LSPs is pre-established between the media gateways and the Local LSRs. This LSP pool is controlled by the super-ordinate manager as part of the initial VPN establishment. The admission managers are given visibility of these LSPs (through their LSP-IDs) and control over their allocation. Path-negotiation occurs as before to select a pair of DM-LSPs but, once chosen, the end-to-end connection is reserved in the following manner. The originating MGC uses H.248 to create a connection between the terminal and the first-stage LSR via one of the pre-configured LSPs that has been selected by the admission manager and is identified by its LSP-ID. The media gateway controller then use COPS to push down the connection between the first stage LSR and the fifth stage LSR. The COPS push will thus contain the incoming LSP-ID (MG to Local) plus the LSP-IDs for the DM-LSP pair-set. The first-stage (Local) LSR uses CR-LDP to establish a path across the core-network to the fifth stage LSR. In parallel the terminating media gateway controller will have issued similar H.248 commands to the terminating media gateway and a COPS push to the fifth-stage LSR to enable the end-to-end connection to be completed. The terminating (fifth stage) LSR needs to be able to correlate the CR-LDP label request message with the COPS push message so that it is able to connect the path across the core network with the path to the terminating media gateway. This may be performed implicitly (i.e. the LSR knows that the next CR-LDP request that it receives from a given first-stage LSR correlates with the most recent COPS push message or explicitly (in that a unique matching identifier is contained in both COPS and CR-LDP message). The latter mechanism may be achieved in several ways. Our preferred method is to pre-allocate a set of third-layer LSP-IDs that are visible to the admission manager. During path negotiation the admission manager selects an unused third-layer LSP-ID and includes this ID with the candidate DM-LSP LSP-ID. Once the path is negotiated, both COPS pushes contain this LSP-ID. The first-stage LSR uses this LSP-ID to identify the third-layer LSP-ID in the Label Request Message (it is the ingress LSRs role to specify a new LSP-ID for each new CR-LSP). The fifth stage LSR can then correlate this to the relevant COPS request.

The process of COPS push allows the policy being applied to a particular controlled flow on an MPLS router to be asynchronously updated. That is, the MPLS router is told how to change the treatment it applies to the flow, without first asking to change it. This process is enabled by the use of ClientHandles to identify the flow.

When the path for a new flow is received at an admission manager, a COPS Decision (DEC) message is pushed, that uses the ClientHandle associated with the outermost LSP. This naturally performs the selection of the first layer ER-LSP. Contained within this DEC is the list of paths over which the flow is to be routed.

5 This list will include the LSP-ID of the near-end dynamic multiplex, the LSP-ID of the far-end dynamic multiplex and the LSP-ID of the connection from the far-end local switch to the destination media gateway.

To enable the transfer of this information, we have defined a new COPS Specific Object. This is shown in figure 7. The object conforms to the existing COPS Specific Object pattern and has a CNum of 40 and CType of 1. The CNum is the identifier for the object, and the CType is the instance of the object. The Object contains the list of LSP-IDs for the flow in the order in which they are to be used. Therefore LSP-ID 1 indicates the near-end dynamic multiplex and will be translated at the Local LSR into a two-tier label stack. Note that although the Clienthandle identifies the layer 1 trunk, this trunk and the dynamic multiplex share the same LSP-ID space at the local router and therefore LSP-ID 1 can easily identify the correct label stack. LSP-ID 2 will contain the LSP-ID of the second dynamic multiplex and LSP-ID 3 will contain the LSP-ID of the last hop from the far-end Local LSR to the MG.

10
15
20

These next two values are the full 48-bit LSP-IDs. In order that these two values should be copied in the same order into each packet in this flow as defined above, they must undergo suitable translation. As is illustrated in figure 10, each LSP-ID consists of a 32-bit IP address and a 16-bit LSP number. It is the 16 bit LSP number that is of interest so each LSP-ID must have the IP address removed and replaced with 4 leading zeros. This makes use of the fact that inserting leading zeros on a binary number leaves the value of that number the same i.e. 1101 = 0000 1101.

25

With this translation performed, the LSP-IDs are inserted in the same order as they occur in the COPS message, into the header of each packet in this flow at the Local LSR. That is, LSP-ID 3 should be the innermost of the labels. Once this is successfully completed, a Report State (RPT) message is returned indicating that the new session has been successfully installed.

30

Once reservation is complete the session can begin. The originating media gateway performs the function of mapping incoming (IP) packets and appending a single label

35

to these packets prior to forwarding to the first-stage LSR. The first-stage LSR terminates the label and uses this as an index to push a 3-label stack onto the payload. The three labels comprise: a third-layer session label a second-layer DM-LSP label (for routing from first to third stage LSRs) and the first-layer label. At the

5 second-stage LSR (Local Tandem) the first-layer CR-LSP is terminated, the second-layer label is used to identify the correct second-stage Layer 1 CR-LSP and its label pushed onto the label-stack. At the third-stage LSR (National Tandem) the second-layer DM-LSP is terminated, the third-layer label being used to index the corresponding Layer 1 and Layer 2 labels to forward the session to the next stage.

10 The action at the fourth stage is analogous to the action at the second stage LSR. At the fifth stage LSR the layer 3 label is swapped for the corresponding label to forward the connection from the fifth stage LSR to terminating media gateway. The terminating media gateway terminates the MPLS stack and routes the packet to the terminating terminal.

15 The label processing in each of the five nodes is illustrated in more detail in figure 8 which also shows how the optional use of penultimate hop popping can be used to improve bandwidth efficiency. Referring to figure 8, the Local LSR receives a packet with the label assigned to the MG-LSP A at configuration time. The payload is

20 retrieved and three labels are pushed: Tunnel A Label/DM-LSP A Label/ Session Label. Assuming penultimate hop popping, then the packet received by the local tandem node is headed by the DM-LSP A Label. As this is the penultimate node for the DM-LSP A its label is popped. The payload and remaining labels are then sent out on Tunnel B with Tunnel B Label. Again with penultimate hop popping the packet

25 received by the national tandem is headed by the session label which is used to identify DM-LSP B and the label pair Tunnel C. These two labels are pushed above the session label. At the distant local tandem the DM-LSP B Label is recognised as a penultimate hop for DM-LSP B and is popped. The payload and remaining labels are sent out on Tunnel D with Tunnel D Label. At the destination Local LSR the

30 packet is headed by the session label which is consumed in identifying MG-LSP B and the packet is delivered to the media gateway with MG-LSP B Label which was established when MG-LSP B was configured.

By analogy with the PSTN five stages of switching appear to be necessary for QoS

35 capable networks leading to Local/Local-Tandem/National-Tandem/Local-Tandem/Local routing for national services and Local/Local-Tandem/International-Tandem/Local-Tandem/Local routing for international services.

By way of example of the efficacy of the techniques described above, consider a carrier having 50 million customers in the USA and a further 50 million customers in the rest of the world with 0.1 Erlang of session traffic per customer. Assume that typically 40% of traffic is long distance and 10% of traffic is International. The United States network could be organised with e.g. five hundred local nodes with typically 100,000 customers each. The Local-Tandems could be disposed in e.g. fifty groups with two switches in each group dedicated to National and International traffic. Approximately one hundred national-tandems and twenty five international-tandems would be deployed throughout the world to provide a global network. In this scheme the local nodes would typically support only 10,000 Erlangs and no tandem node would need to support more than 25,000 Erlang of session traffic. These are trivial amounts of traffic by modern standards and this readily demonstrates the flexibility and efficacy of the five-stage network described herein. The connectivity of such a network is illustrated in figure 9. The nodes as illustrated are Virtual Nodes, a real physical switch could support a number of such Virtual Nodes.

The overall control environment for five-stage MPLS networks is illustrated in figure 10. Each admission manager associated with an media gateway controller maintains a regular dialogue with the DM-LSP control functions in the national and international tandems. On a routine basis, the admission manager informs the DM-LSP Control of its current utilisation of resources on a particular DM-LSP. This allows the DM-LSP Control to evaluate the resource utilisation on the hidden tunnel (i.e. egress from Local LSR to National Tandem or Ingress from National Tandem to Local) for this DM-LSP, and to offer an explicit allocation of resources to the admission manager for the next control interval. Assuming session holding times equivalent to current PSTN practice of about 120 seconds, then control intervals of 10 or 20 seconds would be appropriate. Alternatively the previously described advertisement method could be used.

When a session request arises then the AM on the originating side is able to select an MG-LSP A and to nominate candidate DM-LSPs Ax, Ay, Az which have sufficient allocated resource for the session (optionally it also identifies the LSP-ID that will be used to establish the new layer 3 CR-LSP). The terminating side admission manager is now able to define the LSP-ID tuple for the connection by inspecting candidate DM-LSPs Bx, By, Bz. After selection, the admission manger offers MG-LSP A/DM-LSP A/DM-LSP B/MG-LSP B. This is then used by the admission manager to push

the end-to-end connection. If the DM-LSP Control function is cautious in allocating resources to admission managers, then the whole process is deterministic and the Layer 1 Tunnels need never be overloaded. The explicit path reservation mechanism deployed ensures that this is always the case.

5

It will be understood that the above description of a preferred embodiment is given by way of example only and that various modifications may be made by those skilled in the art without departing from the spirit and scope of the invention.

009220 4230350

WE CLAIM:-

- 5 1. A method of routing an information packet over a label switched path between first and second end stations in a virtual private network defined over a communications network arrangement comprising a hierarchical arrangement of first, second and third levels of routers, the method comprising attaching to the information packet at a network edge a sequence of first, second and third labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual private network, each said path section extending
10 between a pair of said routers.
- 15 2. A method as claimed in claim 1, wherein each said virtual private network is defined by a network of quality of service capable tunnels each disposed between a respective pair of routers.
- 20 3. A method as claimed in claim 3, wherein said second level routers each perform an implicit switching function between the first level and third level routers.
- 25 4. A method as claimed in claim 3, wherein said label switched path sections are incorporated in dynamic multiplexed label switched paths comprising first-stage and second-stage Layer 1 constraint-based routed label switched paths.
- 30 5. A method as claimed in claim 4, wherein a new session is multiplexed onto a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage constraint-based routed label switched paths are satisfied.
- 35 6. A method as claimed in claim 5, wherein the resource availability of the second-stage constraint-based routed label switched paths is advertised periodically to the first-stage constraint-based routed label switched paths, and wherein the resource availability is used to determine path selection
7. A method as claimed in claim 6, wherein the labels defining the sequence of tunnels are assigned during tunnel establishment.

8. A method as claimed in claim 7, wherein the labels defining the sequence of tunnels each identify a respective tunnel by means of a label switched path identifier.

9. A method of routing information packets over a label switched path in a communications multi-service network comprising; a plurality of nodes interconnected via quality of service capable tunnels and incorporating a frame-mode label switched (MPLS) architecture, wherein end-to-end communications having a predetermined quality of service are provided by defining at the network edge a label stack of first, second and third labels for delivering packets through a sequence of said tunnels defined by the label stack.

10. A method as claimed in claim 9, wherein said tunnels are established as label switched path sections incorporated in dynamic multiplexed label switched paths comprising first-stage and second-stage Layer 1 constraint-based routed label switched paths.

11. A method as claimed in claim 10, wherein a new session is multiplexed onto a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage constraint-based routed label switched paths are satisfied.

12. A method as claimed in claim 11, wherein the resource availability of the second-stage constraint-based routed label switched paths is advertised periodically to the first-stage constraint-based routed label switched paths, and wherein the resource availability is used to determine path selection

13. A method as claimed in claim 12, wherein the labels defining the sequence of tunnels are assigned during tunnel establishment.

14. A method as claimed in claim 13, wherein the labels defining the sequence of tunnels each identify a respective tunnel by means of a label switched path identifier.

15. A method as claimed in claim 14, wherein a session established on a said dynamic multiplex constraint based label switched path is identified by the third-layer label.

16. A method as claimed in claim 15, wherein a bandwidth allocation mechanism is used to pre-allocate, on a predictive or as needed basis, capacity within the second-stage Layer 1 constraint-based routed label switched paths such that dynamic multiplexed label switched path selection is deterministic.

17. A communications multi-service network comprising; a plurality of nodes interconnected via quality of service capable tunnels and incorporating a frame-mode label switched (MPLS) architecture, wherein end-to-end communications having a predetermined quality of service are provided by defining at the network edge a label stack of first, second and third labels for delivering packets through a sequence of said tunnels defined by the label stack.

18. A communications multi-service network incorporating a plurality of dynamic multiplex constraint based label switched paths defining quality of service capable tunnels, each said path comprising a second layer constraint based label switched paths constrained within two first-layer constraint based label switched paths.

19. A communications network as claimed in claim 18, wherein a said dynamic multiplex constraint based label switched path has no explicit traffic contact but is constrained entirely by the of its first layer paths.

20. A communications network as claimed in claim 18, wherein a new session is capable of being multiplexed onto a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage constraint-based routed label switched paths are satisfied.

21. A communications network as claimed in claim 20, wherein the resource availability of the second-stage constraint-based routed label switched paths is advertised periodically to the first-stage constraint-based routed label switched paths, and wherein the resource availability is used to determine path selection

22. A communications network as claimed in claim 21, wherein the labels defining the sequence of tunnels are assigned during tunnel establishment.

Variable	Mean	SD	Min	Max
Age	34.5	10.2	21	55
Gender	0.5	0.5	0	1
Marital status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	1500	500	500	3000
Health status	0.8	0.2	0	1
Smoking status	0.3	0.5	0	1
Alcohol consumption	0.2	0.4	0	1
Exercise frequency	0.5	0.5	0	1
Stress level	0.7	0.3	0	1
Depression score	0.4	0.4	0	1
Life satisfaction	0.6	0.3	0	1
Quality of life	0.7	0.2	0	1
Healthcare utilization	0.5	0.5	0	1
Health insurance status	0.9	0.1	0	1
Healthcare access	0.8	0.2	0	1
Healthcare cost	1000	300	500	2000
Healthcare quality	0.7	0.2	0	1
Healthcare satisfaction	0.6	0.3	0	1
Healthcare utilization frequency	0.5	0.5	0	1
Healthcare utilization cost	500	200	250	1000
Healthcare utilization quality	0.7	0.2	0	1
Healthcare utilization satisfaction	0.6	0.3	0	1
Healthcare utilization frequency cost	250	100	125	500
Healthcare utilization frequency quality	0.7	0.2	0	1
Healthcare utilization frequency satisfaction	0.6	0.3	0	1
Healthcare utilization cost quality	0.7	0.2	0	1
Healthcare utilization cost satisfaction	0.6	0.3	0	1
Healthcare utilization quality satisfaction	0.7	0.2	0	1
Healthcare utilization frequency cost quality	0.7	0.2	0	1
Healthcare utilization frequency cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality satisfaction	0.7	0.2	0	1
Healthcare utilization cost quality satisfaction	0.7	0.2	0	1
Healthcare utilization cost frequency satisfaction	0.6	0.3	0	1
Healthcare utilization quality frequency satisfaction	0.7	0.2	0	1
Healthcare utilization frequency cost quality satisfaction	0.7	0.2	0	1
Healthcare utilization frequency cost quality satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.7	0.2	0	1
Healthcare utilization frequency quality cost satisfaction	0.6	0.3	0	1
Healthcare utilization frequency quality cost satisfaction	0.			

10

15

In a label switch communications network, a third level of label is employed in conjunction with a dynamic multiplex constraint-based routed label switched path (CR-LSP) in order to achieve implicit switching at nodes within the network. Implicit switching occurs when a switching function takes place at a node without the need for any control function being required at that node. A three-layer label stack provided at the edge of the network achieves end-to-end connection oriented behaviour with guaranteed Quality of Service. The use of the three-layer label stack concentrates the control of the network to the two edges of the network and a single central switching stage of the network.

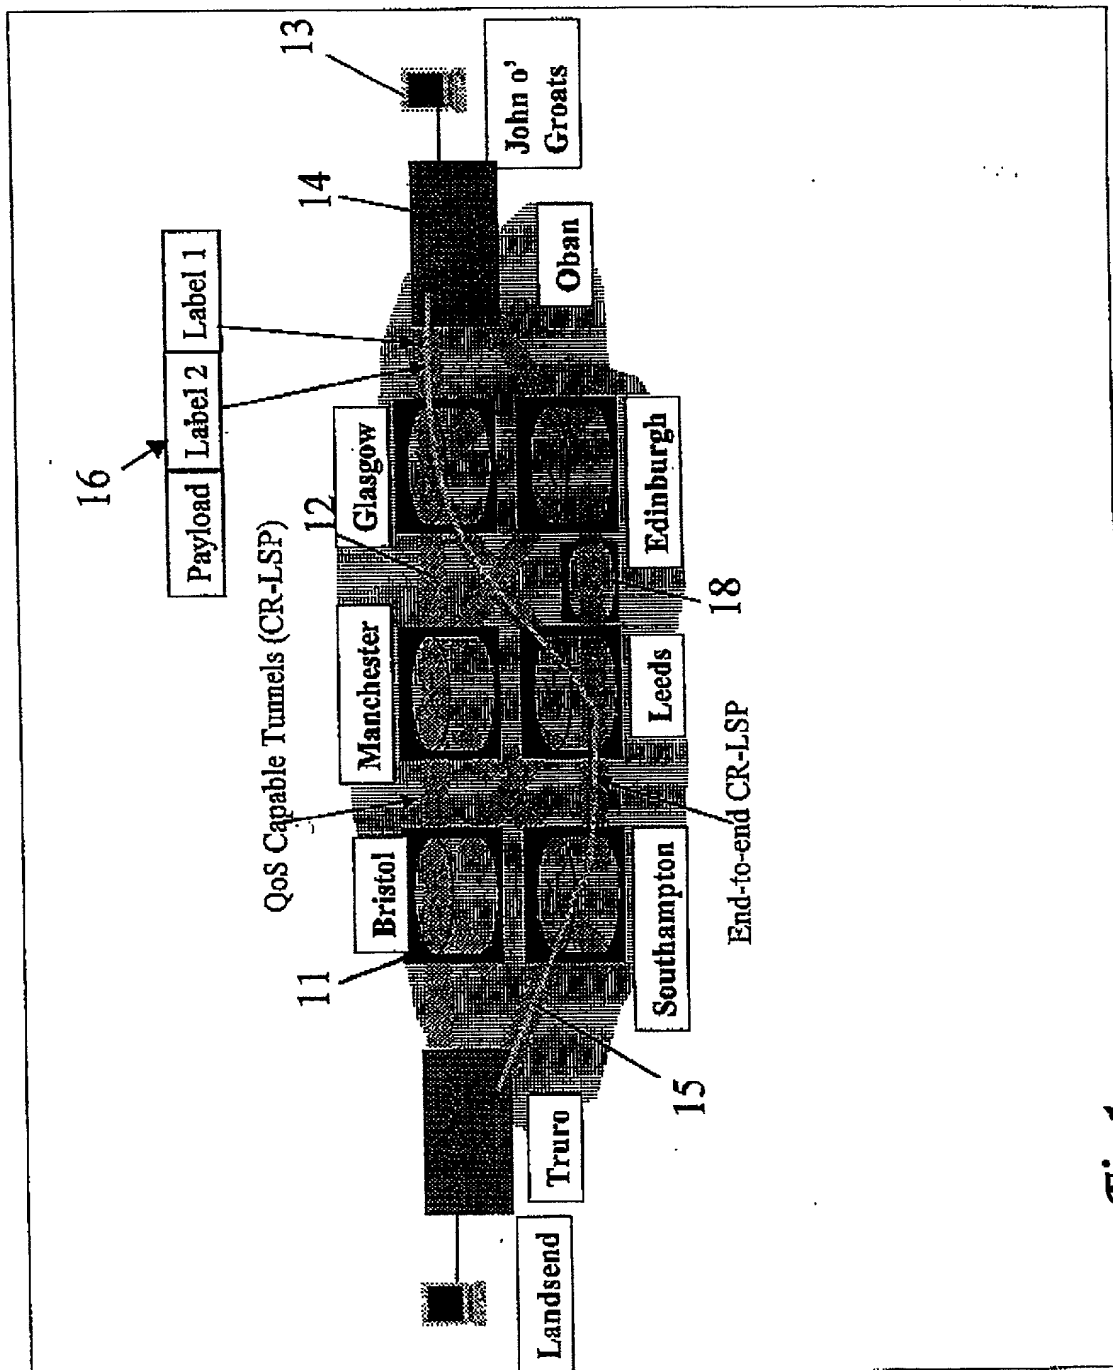


Fig.1

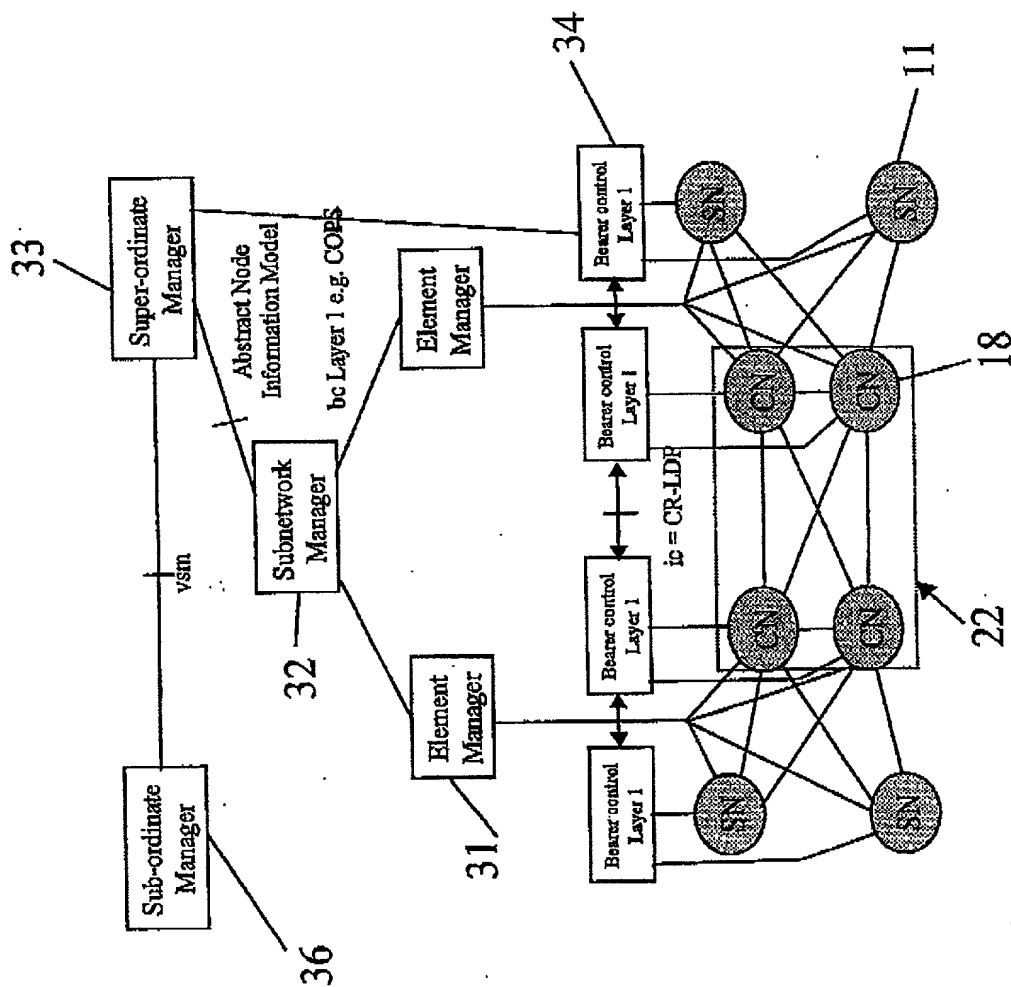


Fig.3

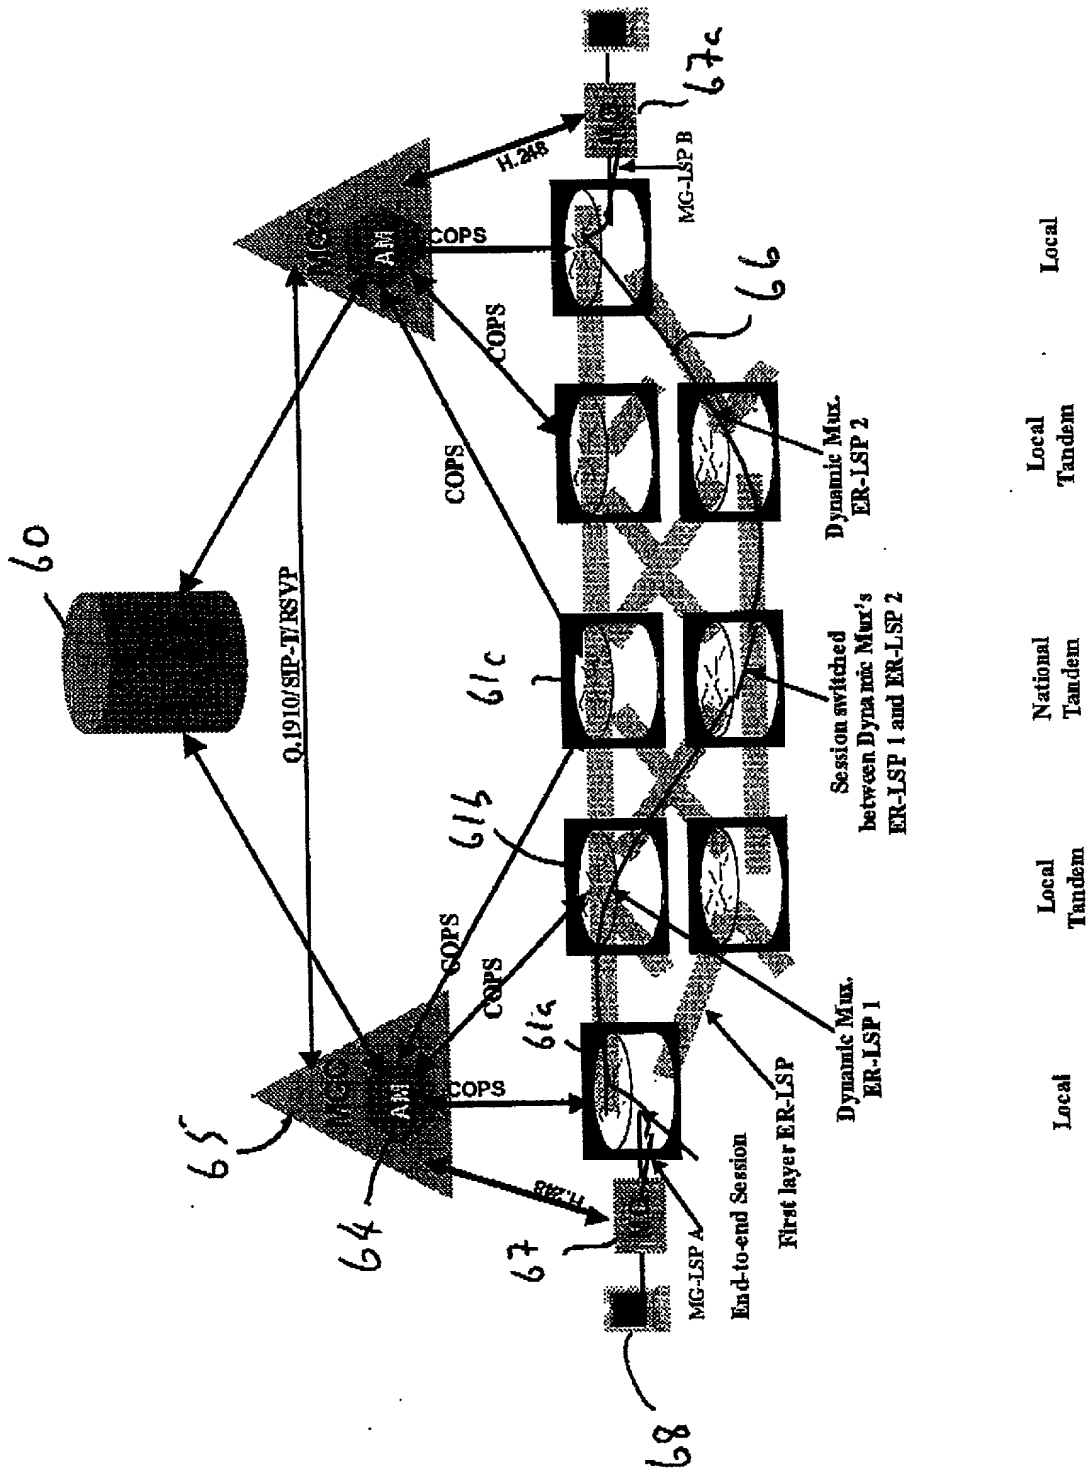


Figure 6 Five-stage LSP with Four-layer Label Control


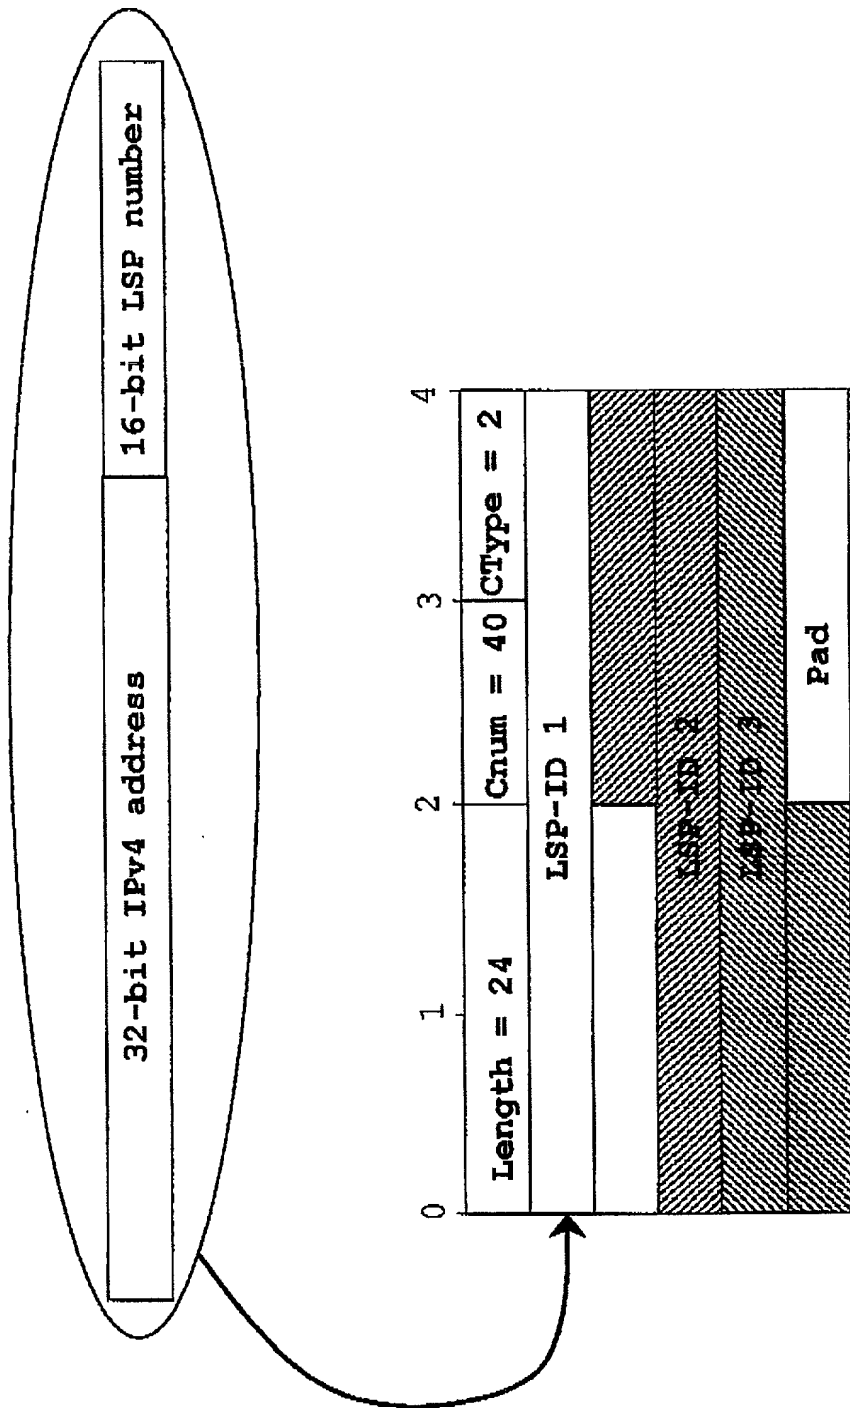


Figure 7 COPS Specific Object for LSP-IDs

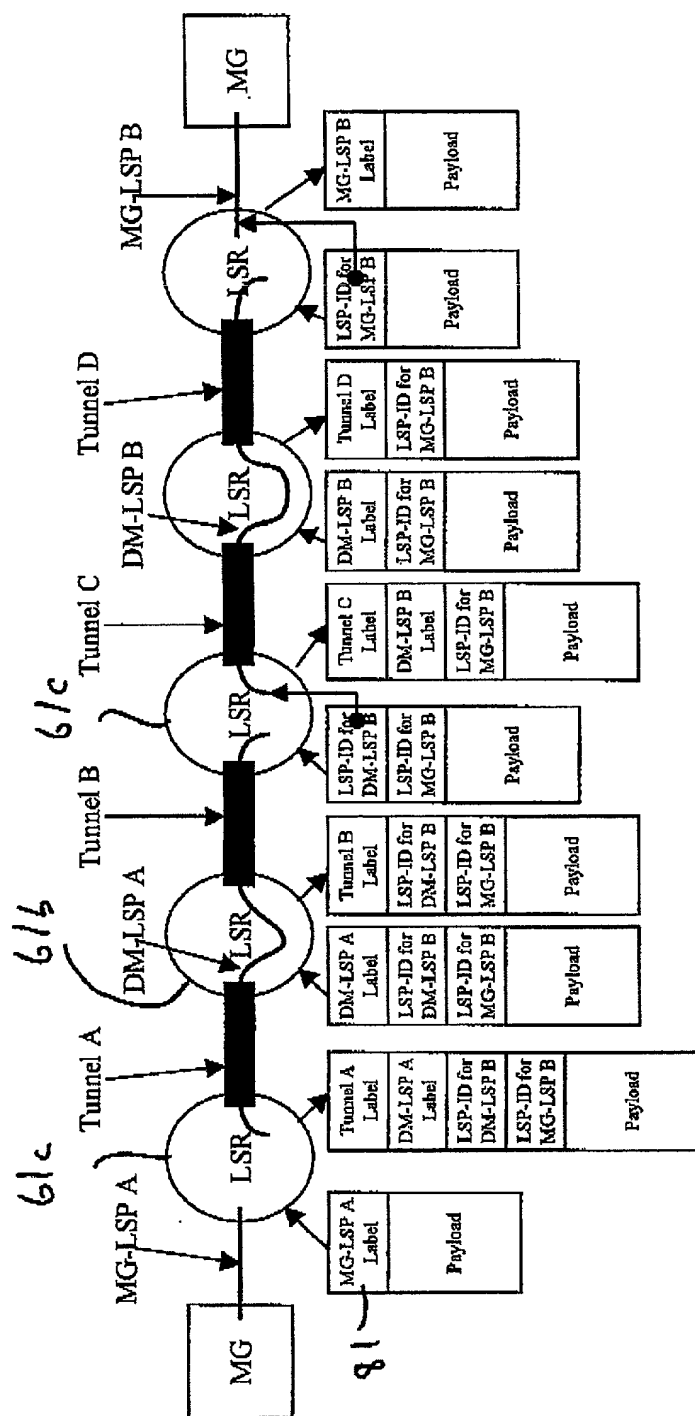

Each Tunnel is assumed to perform penultimate hop popping at the core LSR prior to the VPN LSRs illustrated above

5/28

Figure 8 Packet Formats on Ingress and Egress for Five-stage MPLS Network

